

Digi CM™

Console Server

The Digi CM offers secure, reliable in- and out-of-band management for servers, routers, switches, firewalls and other network equipment.



Overview

The Digi CM provides secure access to any network device, even when the network is down. Users can monitor and control their devices from anywhere using the corporate TCP/IP network, the Internet or dial-up modem connections. This easy-to-use console management tool is ideal for managing servers, routers, switches and any network device with a serial port.

Automatic Device Recognition auto-configures attached devices and populates the Title page with device details. This feature monitors the ports and sends alerts for disconnected or down devices.

The RemotePorts™ feature enables cost-effective management of up to 48 additional remote devices from a single interface. Additional devices can be managed from the Digi CM using an auxiliary device or terminal server, or from across the network.

The Digi CM, used in conjunction with the Digi Remote Power Manager, offers comprehensive infrastructure management. Users can remotely power on/off connected devices, reboot servers, and receive notifications of changes in power usage, temperature readings, system reboots and more.

Related Products




Digi Passport®



Digi Remote Power Manager

Application Highlight

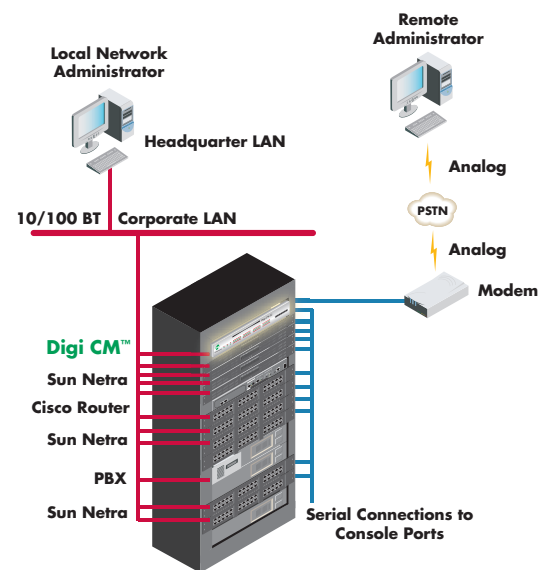

Features/Benefits

- Sun, Cisco, IBM, HP, UNIX®, Linux® and Microsoft Windows Server® 2003 compatible
- TACACS+, RADIUS, LDAP, Kerberos, local user database provide centralized authentication
- SSH v2 ensures secure access
- Secure clustering allows multi-server access via one IP address
- Port buffering/logging for easy troubleshooting
- Straight-through CAT5 cabling for easy, hassle-free server connections
- PC Card slot for increased flash, or additional Ethernet/modem connection
- Email/pager alerts and SNMP traps



Platform	Digi CM™ 8	Digi CM™ 16/32	Digi CM™ 48
Features			
Authentication	TACACS+, RADIUS, LDAP, Kerberos, Local user database		
Security	SSHv2 server and client, SSL, IP filtering, Data capture via port buffering		
Management	Command Line, Web (HTTP/HTTPS), SNMP, Multi-level menuing, Port triggers and alerts		
Operating Systems	Embedded Linux (Hard Hat Distribution)		
Connections	Standard CAT5 cabling for RJ-45 serial ports		
Port Access	Telnet/SSH with menuing, Reverse Telnet/SSH, HTTP/HTTPS, Multiple users per port, SSH sessions simultaneously on all ports, IP addresses per port		
Supported PC Cards	CompactFlash memory card, Wireless LAN adapter (802.11b), Ethernet LAN adapter, PSTN/CDMA modem card		
Rack Mount	19" rack mount kit included		
Memory	64 MB SDRAM, 8 MB Flash		256 MB SDRAM, 16 MB Flash
Dimensions (L x W x D)	9.50 in x 6.25 in x 1.25 in (24.10 cm x 15.90 cm x 3.20 cm)	17.00 in x 8.50 in x 1.75 in (43.20 cm x 21.60 cm x 4.50 cm)	17.50 in x 10.00 in x 1.75 in (44.50 cm x 25.40 cm x 4.50 cm)
Weight	2.50 lb (1.10 kg)	5.80 lb (2.60 kg)	6.40 lb (2.90 kg)
Interfaces			
Serial Ports	8 RJ-45 RS-232	16 or 32 RJ-45 RS-232	48 RJ-45 RS-232
Console Ports	1 RJ-45 RS-232		
Ethernet Ports	1 RJ-45 10/100Base-T		
PC Card Slot	One 16-bit PCMCIA		
Power Requirements			
Power Supply	External 100-240VAC, 50/60 Hz, 12 W max, 6 W typical	Internal 100-240VAC, 50/60 Hz, 40 W max, 12 W typical	
Power Supply MTBF	11 years		
Environmental			
Operating Temperature	5° C to 50° C (41° F to 122° F)		
Storage Temperature	-30° C to +60° C (-20° F to +140° F)		
Regulatory Approvals			
Safety	UL 1950, EN60950		
Emissions/Immunity	CE, FCC Part 15 (Class A), EN55024, EN55022 (Class A)		



- | | |
|-----|------------|
| PIN | SIGNAL |
| 1 | CTS |
| 2 | DSR |
| 3 | RxD |
| 4 | SAFETY GND |
| 5 | DCD |
| 6 | TxD |
| 7 | DTR |
| 8 | RTS |

Microsoft
CERTIFIED
 Partner



Unit 7 Holloways, Bessemer Close, Ebblake Industrial Estate, Verwood, Dorset, BH31 6AZ
Telephone: +44 (0)1202 820290 Fax: +44 (0)1202 820291
Email: sales@bressner.co.uk Website: www.bressner.co.uk