

# Nuvo-7000E/P/DE Series

## Fanless rugged embedded Box PC with Intel® 9th/ 8th-Gen Core™ i7/i5/i3

- Intel® 8th/ 9th-Gen Core™ i hexa-core 35W/ 65W LGA1151 CPU
- Patented Cassette for PCI/PCIe add-on card accommodation\*
- MeziO™ interface for easy function expansion
- Rugged, -25°C to 70°C fanless operation
- Up to 6x GigE ports, supporting 9.5 KB jumbo frame
- M.2 2280 M key socket (Gen3 x4) supporting NVMe SSD or Intel® Optane™ memory
- 4x USB 3.1 Gen2 ports and 4x USB 3.1 Gen1 ports
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution



CE FC \*R.O.C Patent No. M456527

### Introduction

The Neosys Nuvo-7000 series is powered by Intel® 8th/ 9th-Gen Core™ i processors with up to 6-core/ 8-core architecture that offer significant performance improvement over previous 6th and 7th-Gen platforms.

Nuvo-7000 series includes Neosys' track-proven technologies for superior ruggedness and versatility, such as effective fanless design, patented expansion Cassette and proprietary MeziO™ interface. It also incorporates cutting-edge computer I/O like USB 3.1 Gen2 with up to 10 Gbps throughput and M.2 2280 M key socket for NVMe SSD or Intel® Optane™ memory for ultimate system performance. The plethora of on-board I/O ports (GbE, USB and COM) feature sophisticated protection circuits to endure stress from ESD and power surge. This makes Nuvo-7000 series one of the most solid embedded controller on the market.

Flexible and versatile for a variety of applications, Nuvo-7000 variants are available with different Cassette expansion options. With Neosys Nuvo-7000 series, you get a true rugged platform that can accommodate a single PCIe card (Nuvo-7000E), dual PCIe cards (Nuvo-7000DE) or a single PCI card (Nuvo-7000P) according your application needs.

### Specifications


System Core		Expansion Bus	
<b>Processor</b>	Supporting Intel® 8th/ 9th-Gen CPU (LGA1151 socket, 65W/ 35W TDP) - Intel® Core™ i7-8700/ i7-8700T/ i7-9700E/ i7-9700TE - Intel® Core™ i5-8500/ i5-8500T/ i5-9500E/ i5-9500TE - Intel® Core™ i3-8100/ i3-8100T/ i3-9100E/ i3-9100TE - Intel® Pentium® G5400/ G5400T - Intel® Celeron® G4900/ G4900T	<b>PCI/PCI Express</b>	1x PCIe x16 slot@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-7002E/ 7006E) 2x PCIe x8 slots@Gen3, 4-lanes PCIe signals in Cassette (Nuvo-7002DE/ 7006DE) 1x PCI slot in Cassette (Nuvo-7002P/ 7006P)
<b>Chipset</b>	Intel® Q370 platform controller hub	<b>Mini PCI Express</b>	1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA)
<b>Graphics</b>	Integrated Intel® UHD graphics 630	<b>M.2</b>	1x M.2 2242 B key socket with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
<b>Memory</b>	Up to 64 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	<b>Expandable I/O</b>	1x MeziO™ expansion port for Neosys MeziO™ modules
<b>AMT</b>	Supports AMT 12.0	<b>Power Supply</b>	
<b>TPM</b>	Supports TPM 2.0	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8-35VDC input
<b>I/O Interface</b>		<b>Remote Ctrl. &amp; LED Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>Ethernet</b>	2x Gigabit Ethernet ports by I219 and I210 (Nuvo-7002E/ P/ DE) 6x Gigabit Ethernet ports by I219 and 5x I210 (Nuvo-7006E/ P/ DE)	<b>Mechanical</b>	
<b>PoE+</b>	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	<b>Dimension</b>	240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-7000E/ P series) 240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-7000DE series)
<b>USB</b>	4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	<b>Weight</b>	3.58 kg (Nuvo-7000E/ P series) 3.7 kg (Nuvo-7000DE series)
<b>Video Port (Integrated Graphics)</b>	1x VGA connector, supporting 1920 x 1200 resolution 1x DVI-D connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution	<b>Mounting</b>	Wall-mount (standard) or DIN-Rail (optional)
<b>Serial Port</b>	2x software-programmable RS-232/ 422/ 485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Environmental</b>	
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out	<b>Operating Temperature</b>	with 35W CPU -25°C ~ 70°C ** with 65W CPU -25°C ~ 70°C */** (configured as 35W TDP) -25°C ~ 50°C */** (configured as 65W TDP)
<b>Storage Interface</b>		<b>Storage Temperature</b>	-40°C ~ 85°C
<b>SATA HDD</b>	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	<b>Humidity</b>	10%~90% , non-condensing
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation	<b>Vibration</b>	Operating, MIL-STD-810G, Method 514.6, Category 4
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)	<b>Shock</b>	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
		<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55024

\* For i7-8700 and i7-9700E running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.


\*\* For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

# Nuvo-7000E/P/DE Series

## Appearance

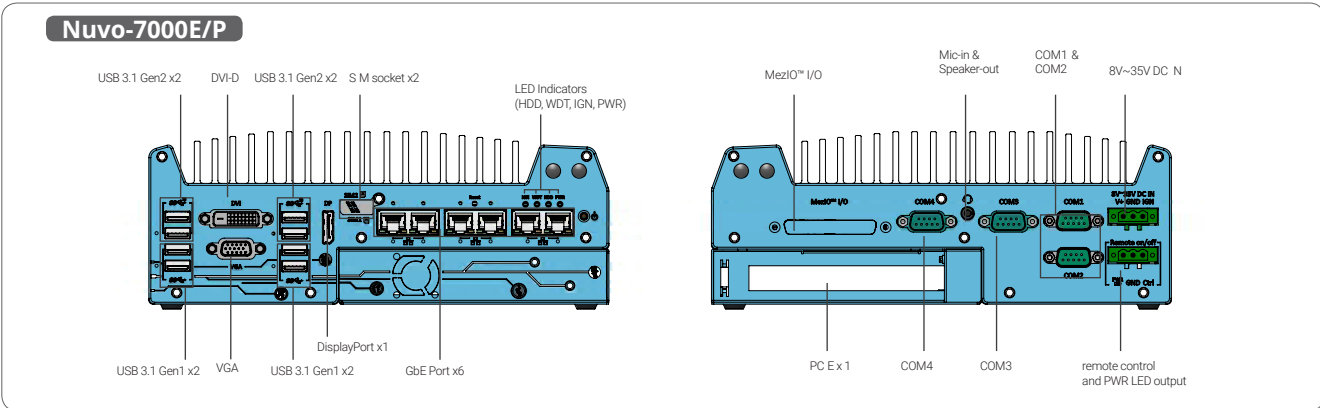

## Dimensions

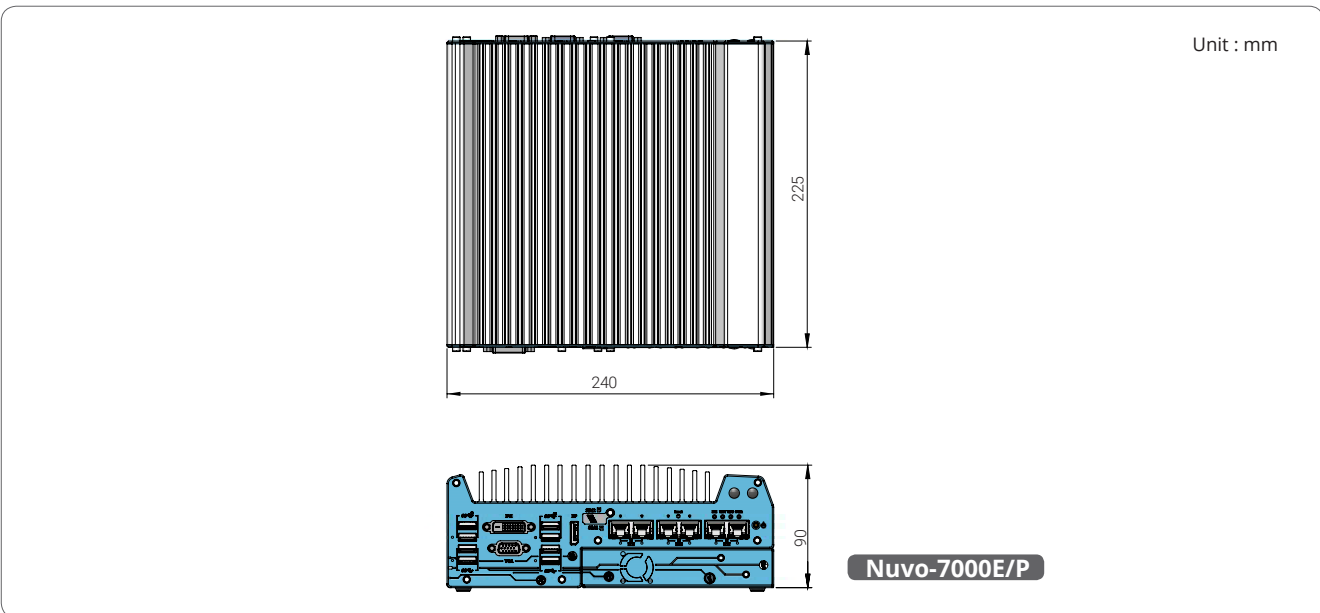

Unit : mm

## Ordering information

Model No.	Product Description
<b>Nuvo-7002E</b>	Intel® 8th/ 9th-Gen Core™ fanless controller with 2x GbE, single-slot PCI Express Cassette and MeziO™ interface
<b>Nuvo-7002P</b>	Intel® 8th/ 9th-Gen Core™ fanless controller with 2x GbE, single-slot PCI Cassette and MeziO™ interface
<b>Nuvo-7006E</b>	Intel® 8th/ 9th-Gen Core™ fanless controller with 6x GbE, single-slot PCI Express Cassette and MeziO™ interface
<b>Nuvo-7006P</b>	Intel® 8th/ 9th-Gen Core™ fanless controller with 6x GbE, single-slot PCI Cassette and MeziO™ interface
<b>Optional IEEE 802.3at PoE+ for GbE ports 3 ~ 6</b>	

## Optional accessories

<b>DINRAIL-O</b>	DIN-rail mounting assembly for Nuvo-7000 series
<b>Dmpbr-Nuvo5000_7000</b>	Neosys' patented damping bracket assembly for Nuvo-7000E/DE/P
<b>Fankit-25</b>	Fan assembly for 1-slot Cassette, 25x25x10 mm
<b>PA-160W-OW</b>	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30°C to 70°C.
<b>ETHY-100-2008S</b>	Ethernet I/O expansion module with 8 isolated digital inputs and outputs
<b>ETHY-100-2604S</b>	Ethernet I/O expansion module with 8 isolated digital inputs and 4 relays outputs (coming soon)
<b>Cassette Modules</b>	
<b>CSM-PoE354</b>	Cassette module with PCIe-PoE354at and pre-installed passive heat-spreader
<b>CSM-USB380</b>	Cassette module with PCIe-USB380 and pre-installed


## MeziO™ Modules

<b>MeziO™ -C180</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
<b>MeziO™ -C181</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
<b>MeziO™ -D220</b>	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
<b>MeziO™ -D230</b>	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
<b>MeziO™ -V20-EP</b>	MeziO™ module with ignition power control function for in-vehicle application
<b>MeziO™ -U4</b>	MeziO™ module with 4x USB3.0 ports
<b>MeziO™ -G4</b>	MeziO™ module with 4x GigE ports
<b>MeziO™ -G4P</b>	MeziO™ module with 4x IEEE 802.3at PoE+ ports


Only Nuvo-7006E-PoE and Nuvo-7006P-PoE support MeziO™-G4P

# Nuvo-7000E/P/DE Series

## Appearance

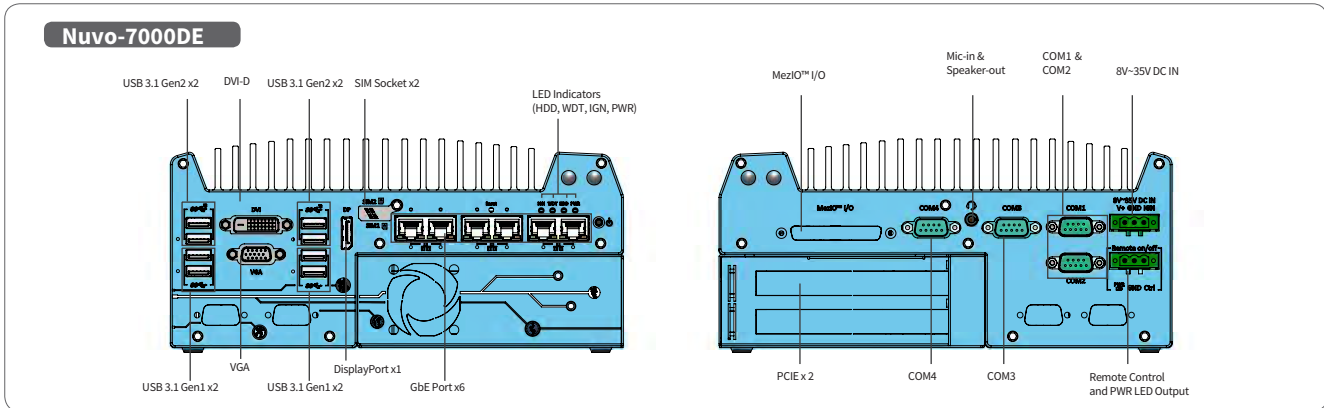

## Dimensions

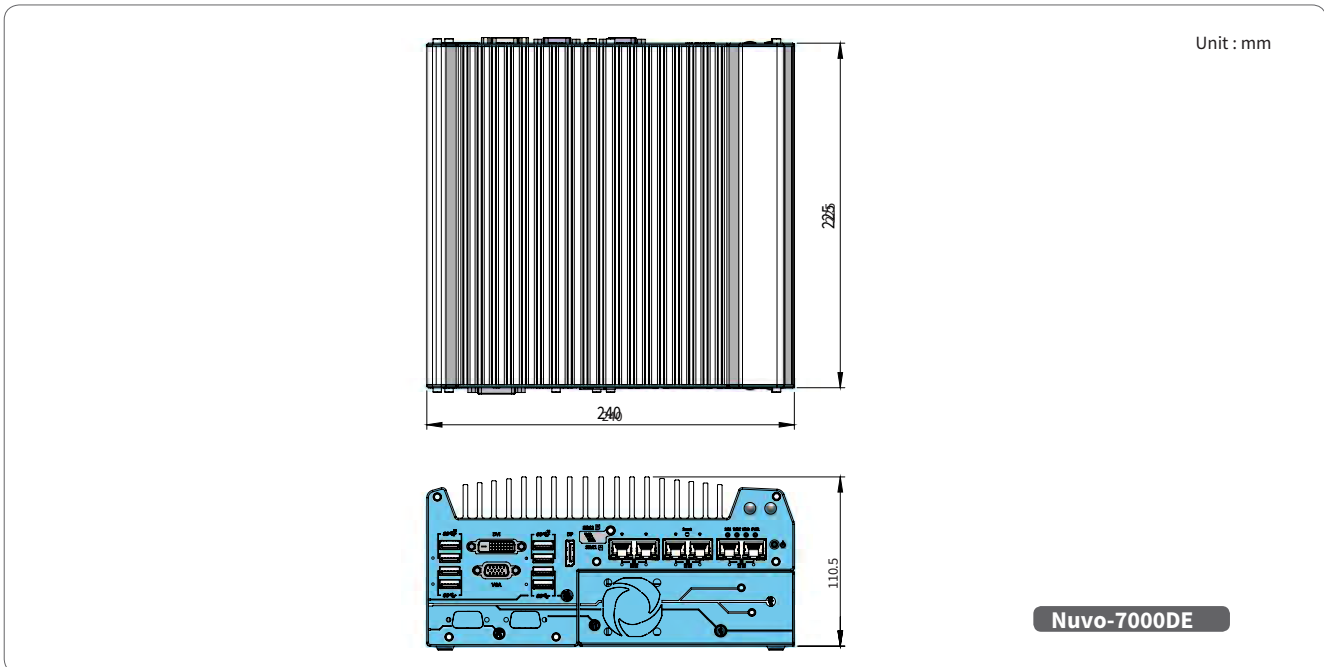

## Ordering information

Model No.	Product Description
<b>Nuvo-7002DE</b>	Intel® 8th/9th-Gen Core™ fanless controller with 2x GbE, dual-slot PCI Express Cassette and MeziO™ interface
<b>Nuvo-7006DE</b>	Intel® 8th/9th-Gen Core™ fanless controller with 6x GbE, dual-slot PCI Express Cassette and MeziO™ interface
<i>Optional IEEE 802.3at PoE+ for GbE ports 3 ~ 6</i>	

## Optional accessories

<b>PA-160W-OW</b>	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30 to 70°C.
<b>Fankit-40</b>	Fan assembly for 1-slot Cassette, 40x40x10 mm
<b>Dmpbr-Nuvo5000_7000</b>	Neosys' patented damping bracket assembly for Nuvo-7000E/DE/P
<b>DINRAIL-O</b>	DIN-rail mounting assembly for Nuvo-7000 series
<b>ETHY-100-2008S</b>	Ethernet I/O expansion module with 8 isolated digital inputs and outputs
<b>ETHY-100-2604S</b>	Ethernet I/O expansion module with 8 isolated digital inputs and 4 relays outputs (coming soon)
<b>MeziO™ Modules</b>	
<b>MeziO™-C180</b>	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-232 ports
<b>MeziO™-C181</b>	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-422/485 ports
<b>MeziO™-D220</b>	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
<b>MeziO™-D230</b>	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
<b>MeziO™-V20-EP</b>	MeziO™ module with ignition power control function for in-vehicle application